



600 Harvest Gate
Lake in the Hills, IL 60156

(847) 960-7440
Fax: (847) 960-7445
www.lith.org

SPAS/HOT TUBS

DECORATIVE YARD PONDS

Spas / Hot Tubs:

All Spas/Hot Tub to be on an approved surface.

All spas / Hot tubs to have a means of outside electrical disconnection. Liquidtight flexible metal conduit (LFMC) not to exceed 5' in length and designed for wet locations (Article 348) or Rigid metal conduit (RMC) (Article 344) to be used for wire raceways in accordance with the 2008 National Electric Code.

All Spas/Hot Tubs must have its own lockable safety cover.

Decorative yard ponds:

All decorative yard ponds not to exceed 24" in depth.

In damp or wet locations, boxes, conduit bodies, and fittings shall be placed or equipped so as to prevent moisture from entering or accumulating within. (Article 314.15 NEC) All receptacles and or pumps to be GFCI protected, all outside receptacles to have an in use cover. All wiring to conform to the 2008 National Electric Code.


PERMIT IS REQUIRED

CAUTION: Contact J.U.L.I.E. 48 hours before you dig. 800-892-0123

<p>CONSTRUCTION HOURS MONDAY THROUGH SATURDAY – 7:30 AM TO 8:00 PM</p>
--


Cash, checks payable to the Village of Lake in the Hills and credit cards (Master Card, American Express and Discover) are accepted.

HOT TUBS & SPAS - ELECTRICAL REQUIREMENTS

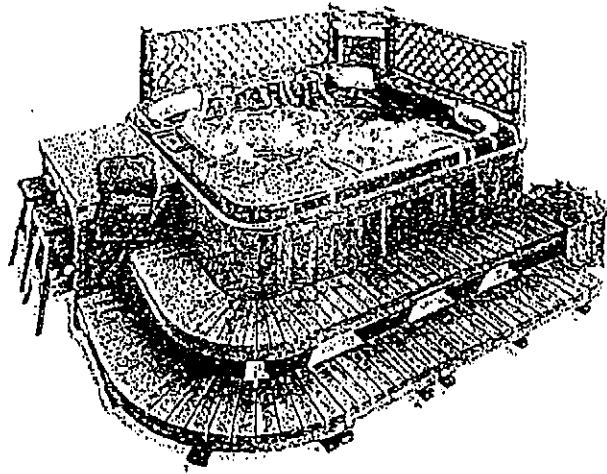

Spas and Hot Tubs

A spa or hot tub is a hydromassage pool or tub for recreational or therapeutic use, not located in health care facilities, designed for immersion of users. It usually has a filter, heater and motor-driven blower and is permitted to be installed indoors or outdoors, on the ground or supporting structure or in the ground or supporting structure. Generally, a spa or hot tub is not designed or intended to have its contents drained or discharged after each use.

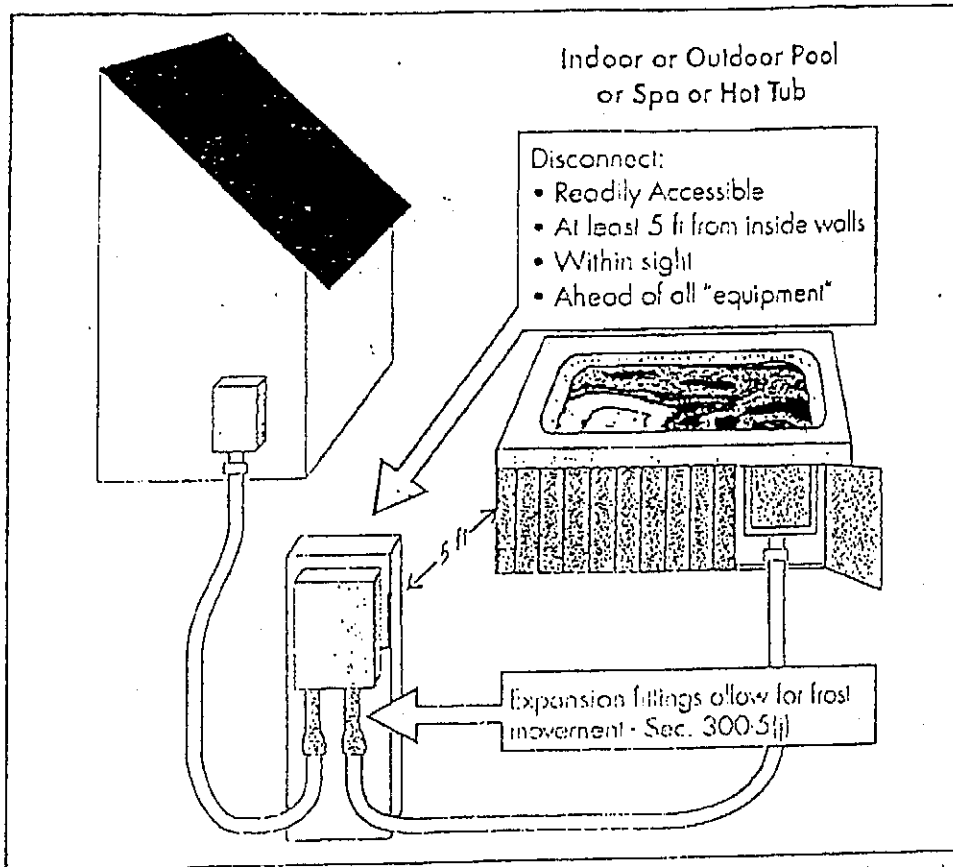

■ Fig. 1.13. A disconnecting means is now intended to be placed within sight of pool, spa, and hot tub equipment.

680-12. Disconnecting Means. Disconnecting means shall be accessible, located within sight from pool, spa, or hot tub equipment, and shall be located at least 5 ft (1.52 m) horizontally from the inside walls of the pool, spa, or hot tub.